



YELLOW PASSIVATED WOOD SCREWS

Flat countersunk wood screws, designed for use without pilot holes.

The sharp point with double angle taper bites quickly into any type of timber from extremely hard to soft wood and chipboard. The deep thread with wide pitch gives high stripping torque.

Available: 3-6mm gauge, 12-150mm long.




MACHINE SCREWS

Flat countersunk maximum strength machine screws, ideal for use with window espagnolette handles.

M5 x 50mm yellow passivated finish.

M5 x 35mm zinc finish.

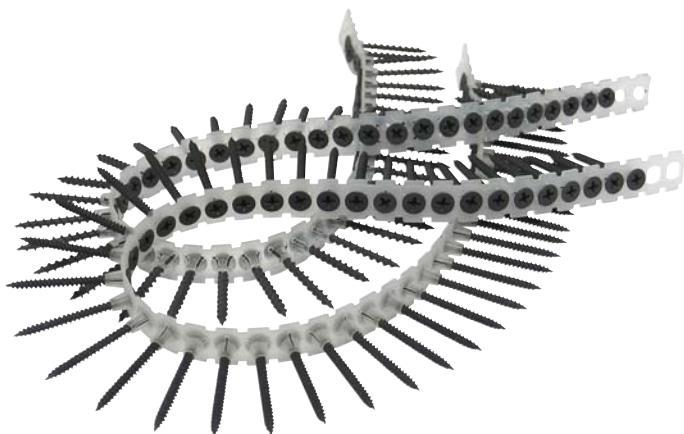

COLLATED DRY WALL SCREWS

Collated flat countersunk dry wall screws for auto-feed with a black phosphate coating and extra sharp point.

3.5 gauge: 25, 35, 38, 42, 45 and 55mm long.



FIXING PLUGS

Tough high density polythene fixing plugs which provide a high strength, secure wall fixing.

Brown: 7x42mm for use with a 7mm bit and No.10-14 screws.

Red: 5.5x34mm for use with a 5.5mm bit and No.6-10 screws.



STAR DOWELS

Self driven, high strength mild steel star dowels for fixing timber to timber.

Available: 15, 29, 33, 38, 41, 44, 50 and 60mm long.



FLAT DOWELS

Flat dowels (biscuits) made from compressed beech wood, expands when in contact with PVA woodworking adhesive.

No.00 47x15x4mm for 10-12mm board

No.10 54x19x4mm for 13-18mm board

No.20 60x22x4mm for 19+ mm board



WORKTOP CLAMPS

Zinc plated worktop clamps ensure the worksurface is firmly and securely fixed.